




CHINA QINGDAO

www.rdfog.com



Model		RDSS-30	
Max. Throw (m) :	30	Voltage :	380V 50hz 3P
Nozzles :	30	Max. coverage area(m²):	3000
Water Consumption (L/min) :	20	Control mode :	Manual/remote control
Horizontal Rotation Angle :	0~360°	Rotation method:	Hydraulic
Elevation AnglePitch :	-10°~45°	Weight (Kg)	350
Water Pump :	Stainless steel multistage centrifugal pump		
Pump Power (Kw) :	1.5	Inlet size(in):	1.5
Nominal Fan Power (Kw) :	3	Dimension(L*W*H/m):	1.4*0.76*1.70


* Accept OEM customized solutions

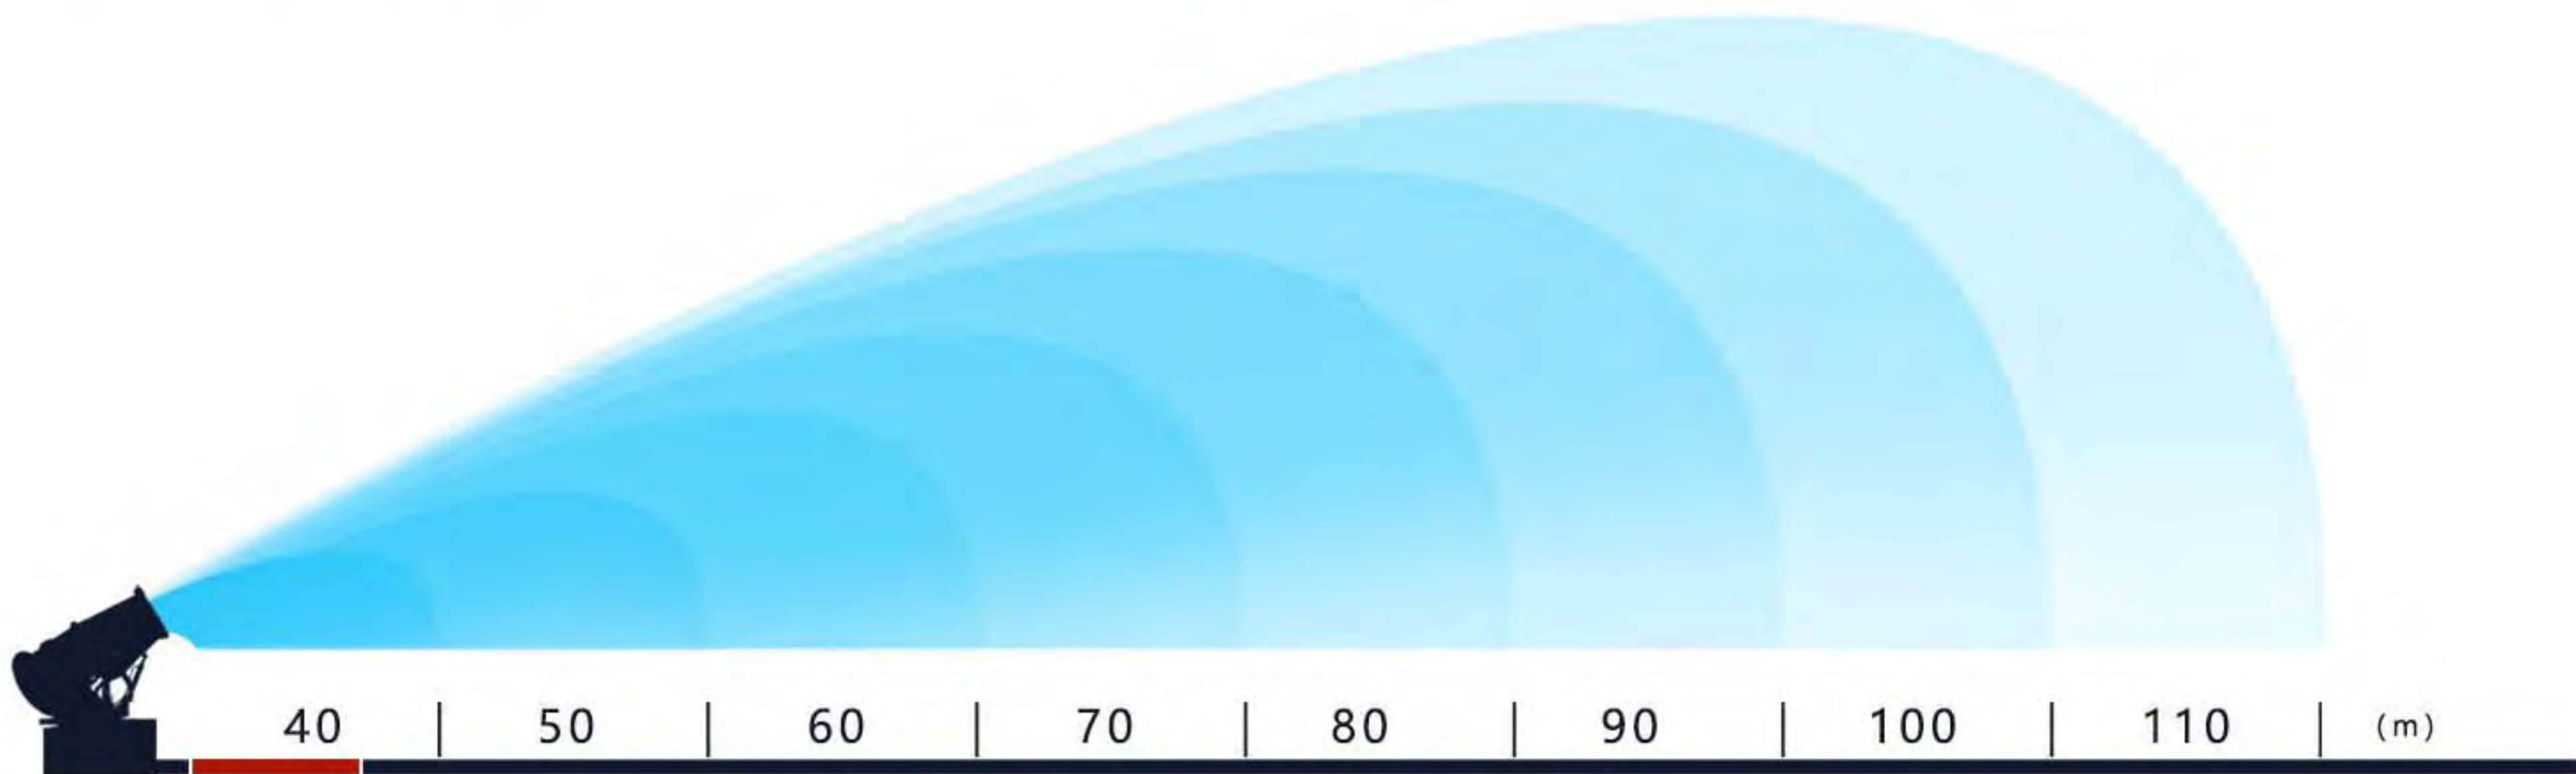



Model		RDSS-40	
Max. Throw (m) :	40	Voltage :	380V 50hz 3P
Nozzles :	40	Max. coverage area(m ²) :	4500
Water Consumption (L/min) :	40	Control mode :	Manual/remote control
Horizontal Rotation Angle :	0~360°	Rotation method :	Hydraulic
Elevation AnglePitch :	-10°~45°	Weight (Kg)	450
Water Pump :	Stainless steel multistage centrifugal pump		
Pump Power (Kw) :	1.5	Inlet size(in):	1.5
Nominal Fan Power (Kw) :	7.5	Dimension(L*W*H/m):	1.75*1.00*1.80


* Accept OEM customized solutions

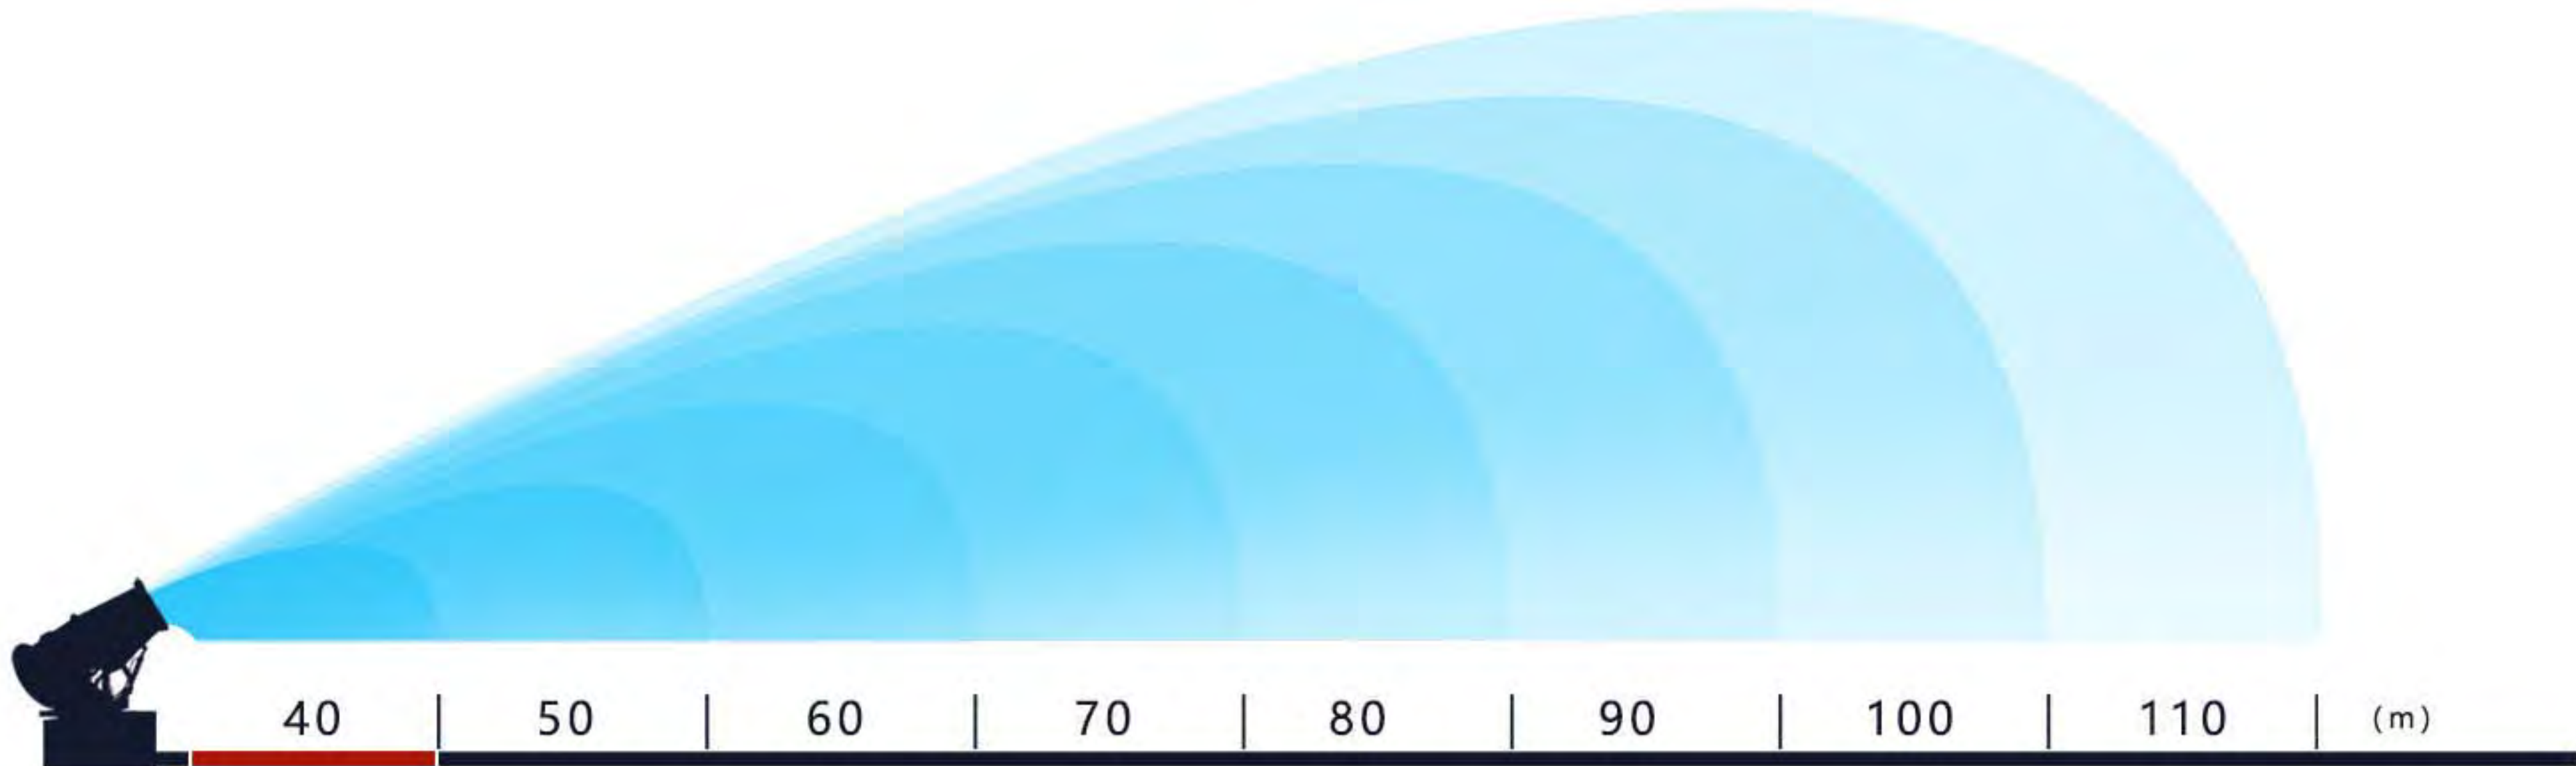




Model		RDSS-60	
Max. Throw (m) :	60	Voltage :	380V 50hz 3P
Nozzles :	60	Max. coverage area(m ²) :	9000
Water Consumption (L/min) :	70	Control mode :	Manual/remote control
Horizontal Rotation Angle :	0~360°	Rotation method :	Hydraulic
Elevation AnglePitch :	-10°~45°	Weight (Kg)	600
Water Pump :	Stainless steel multistage centrifugal pump		
Pump Power (Kw) :	4	Inlet size(in):	1.5
Nominal Fan Power (Kw) :	18.5	Dimension(L*W*H/m):	1.95*1.2*2.1


* Accept OEM customized solutions

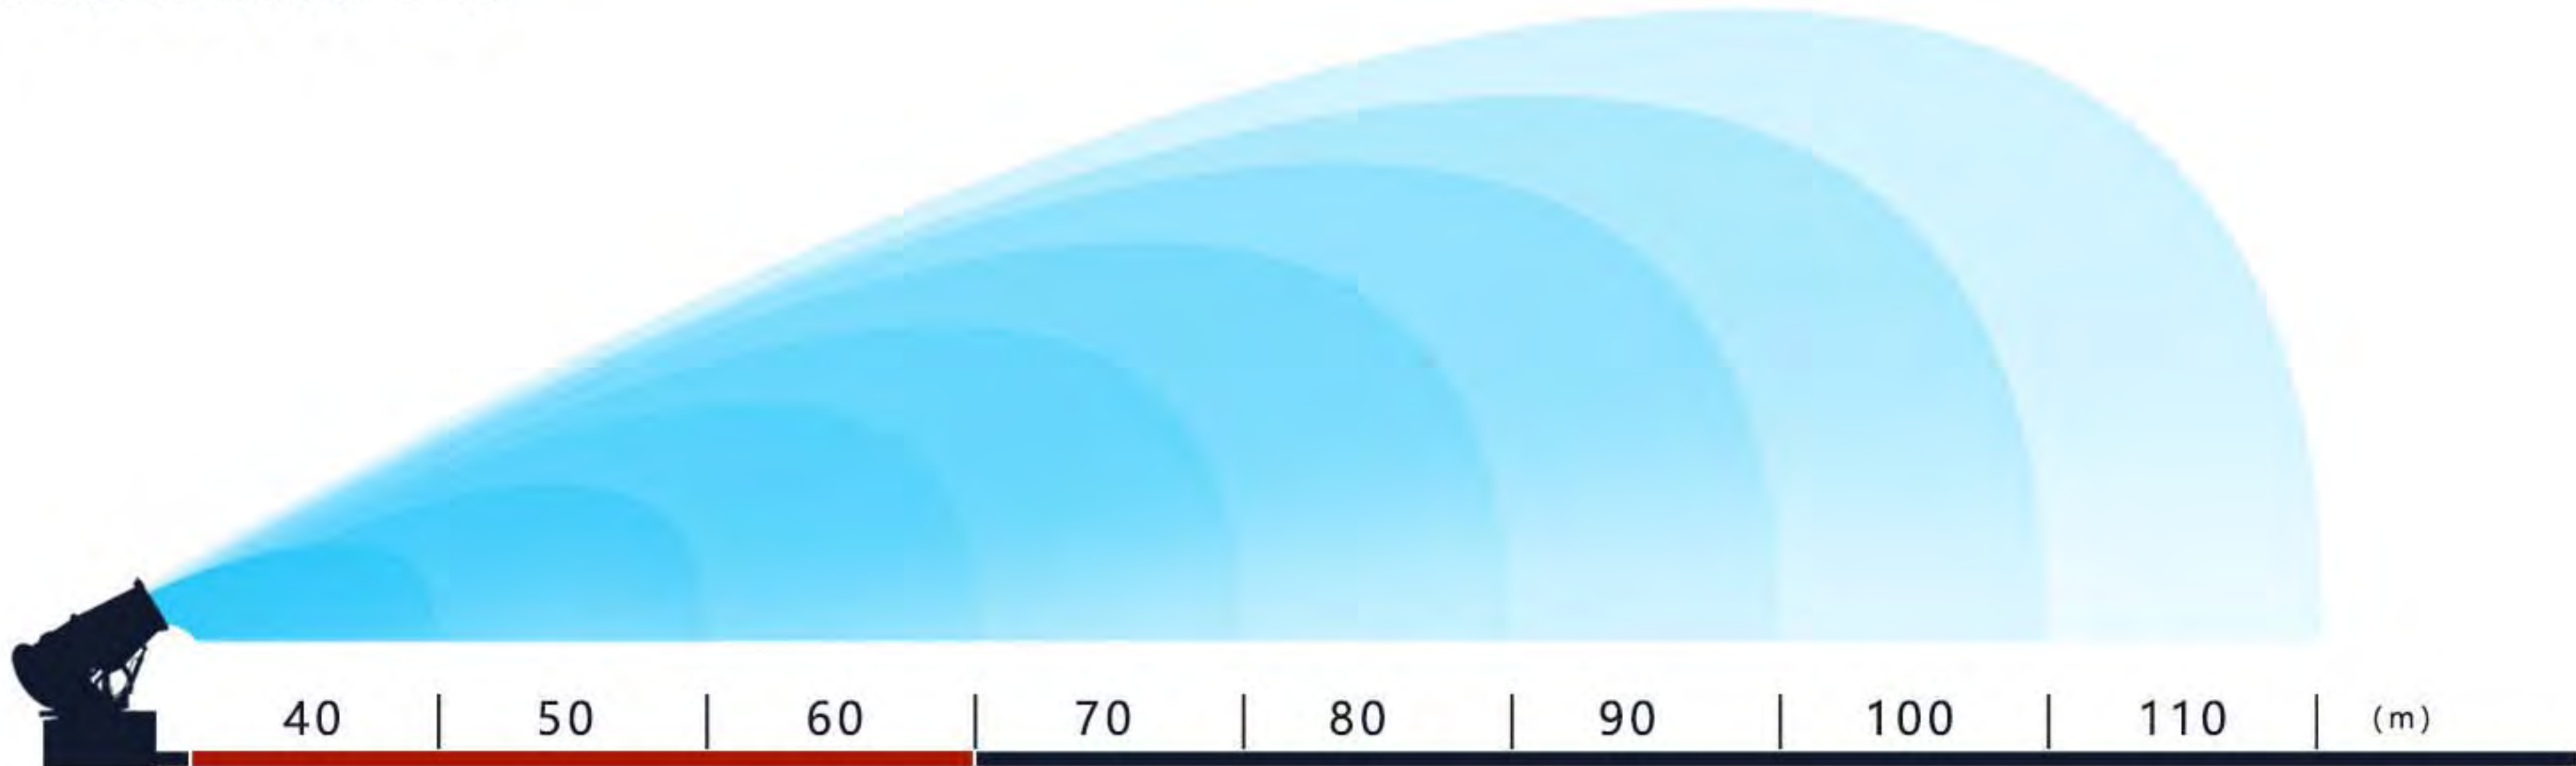

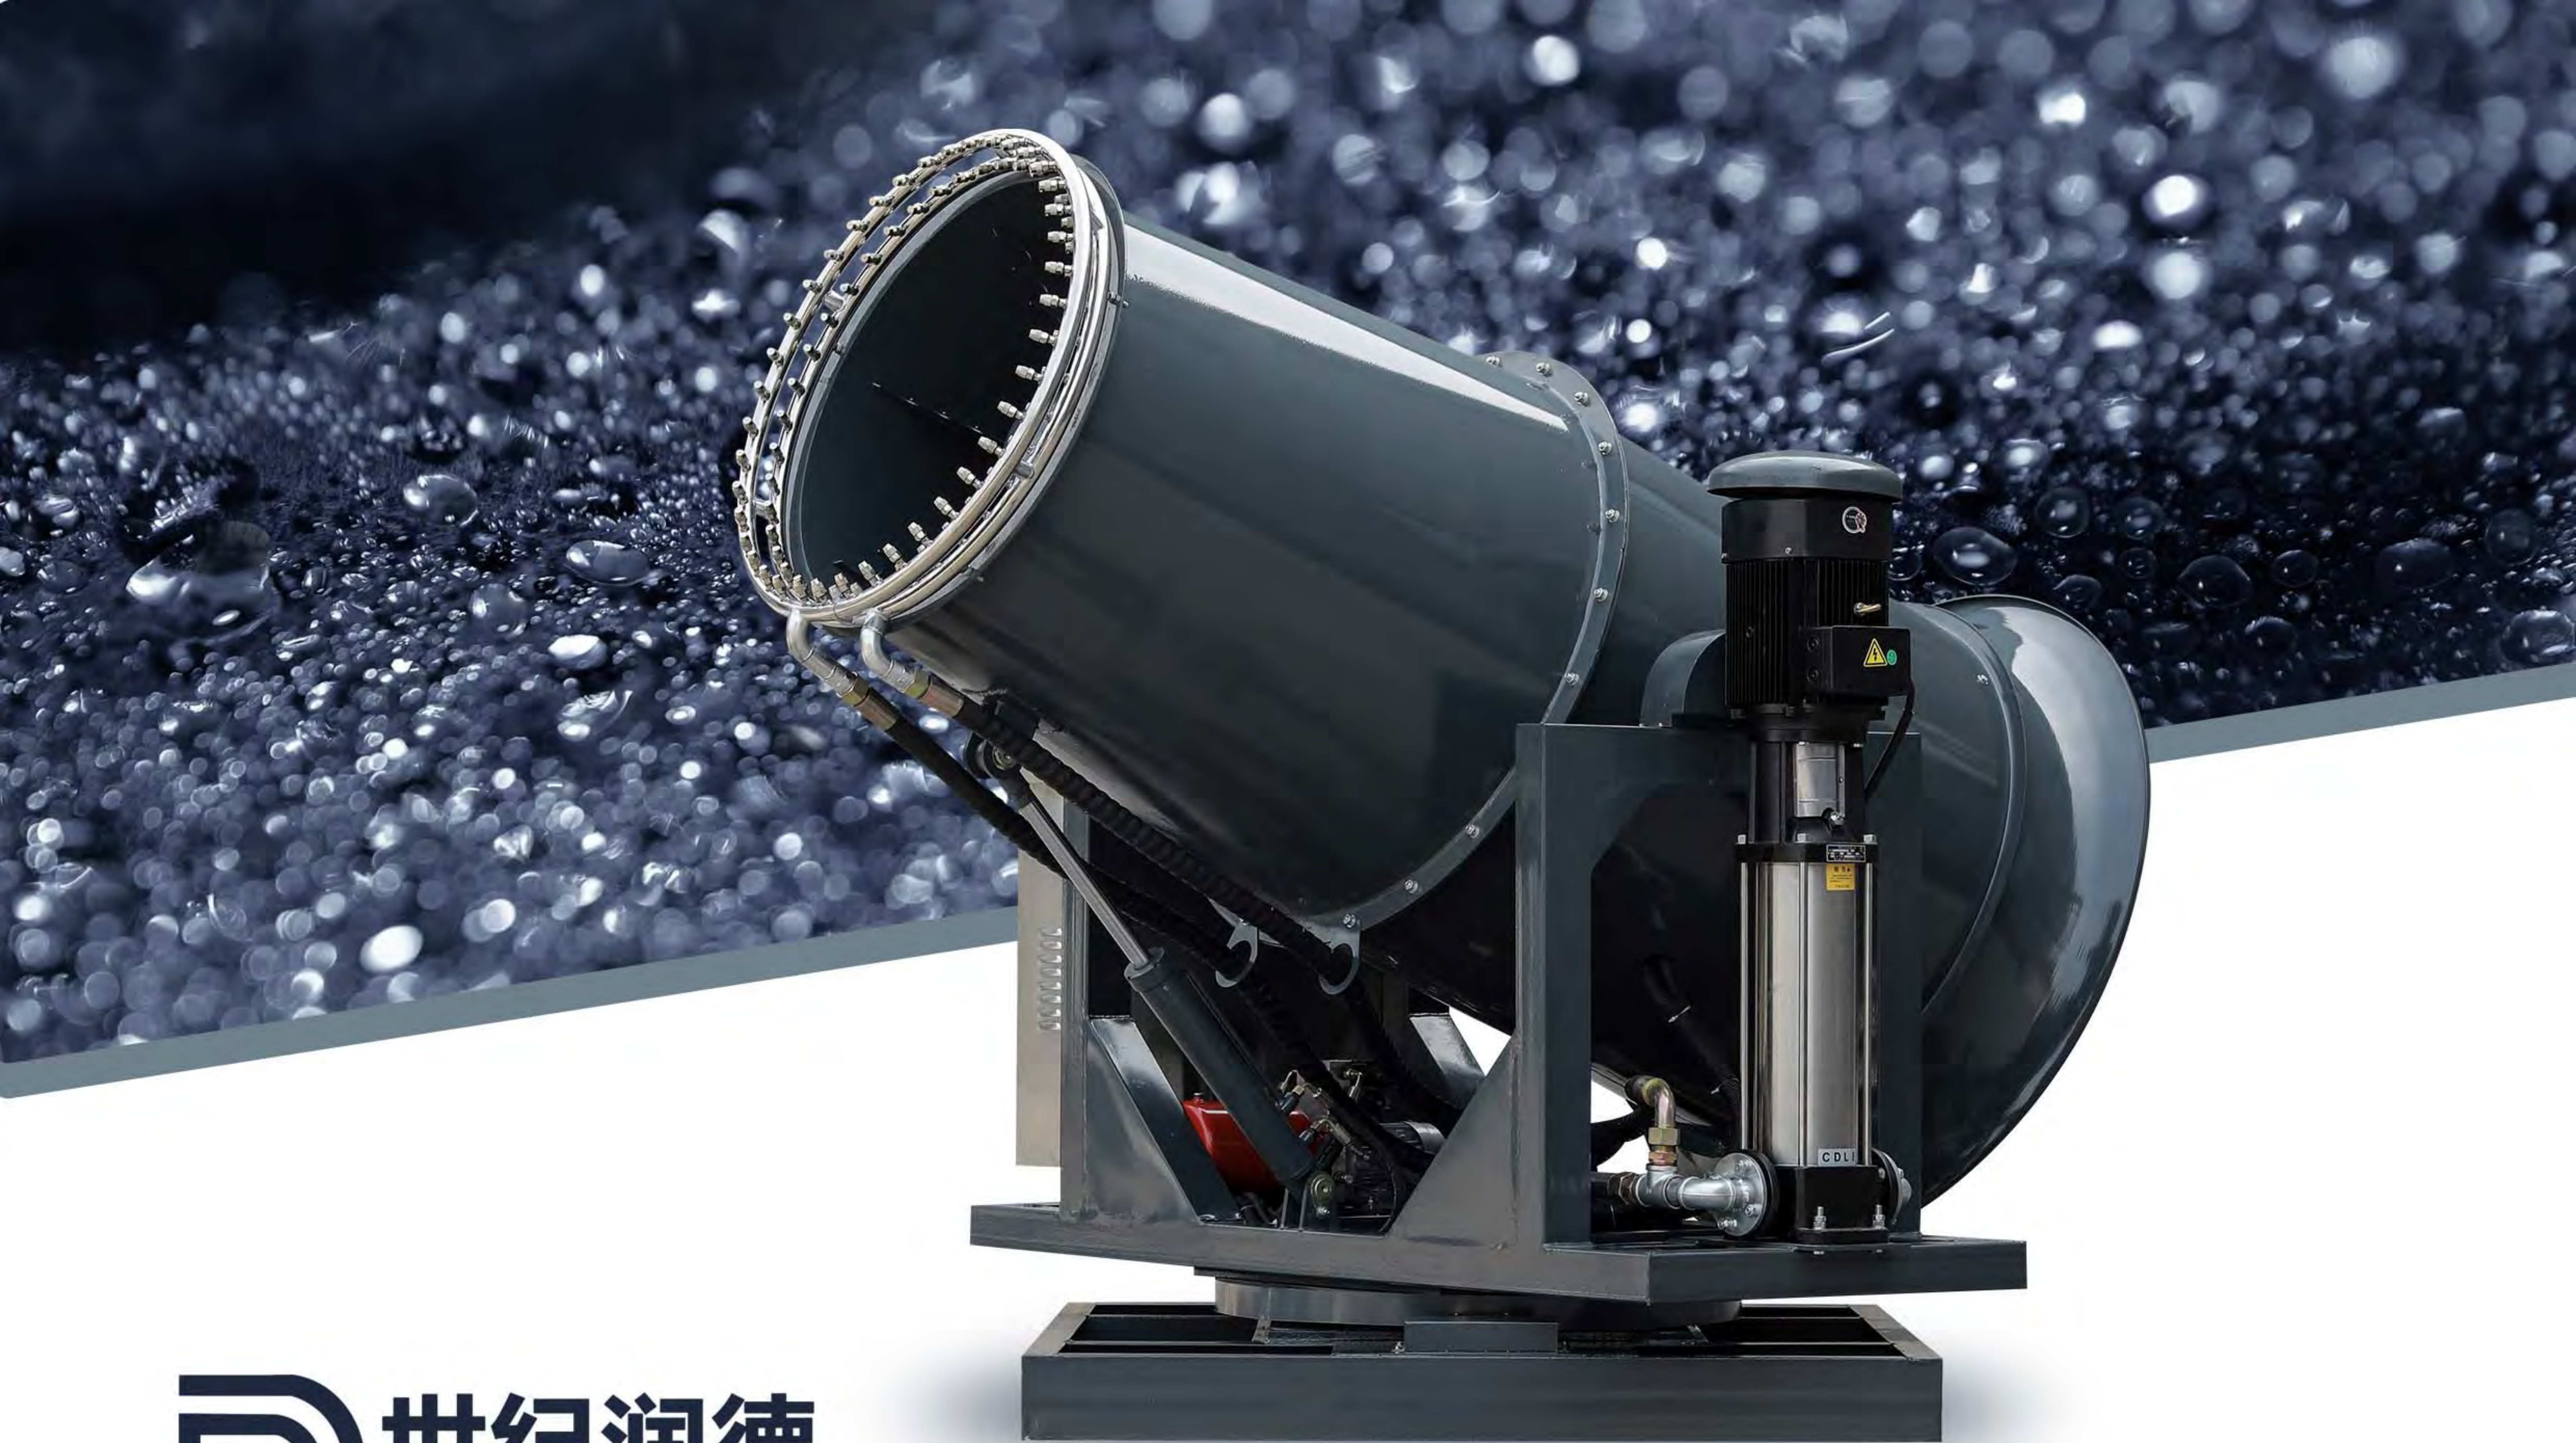

Model		RDSS-80	
Max. Throw (m) :	80	Voltage :	380V 50hz 3P
Nozzles :	80	Max. coverage area(m ²) :	15000
Water Consumption (L/min) :	160	Control mode :	Manual/remote control
Horizontal Rotation Angle :	0~360°	Rotation method :	Hydraulic
Elevation AnglePitch :	-10°~45°	Weight (Kg)	1200
Water Pump :	Stainless steel multistage centrifugal pump		
Pump Power (Kw) :	7.5	Inlet size(in):	1.5
Nominal Fan Power (Kw) :	37	Dimension(L*W*H/m):	2.5*1.8*2


* Accept OEM customized solutions

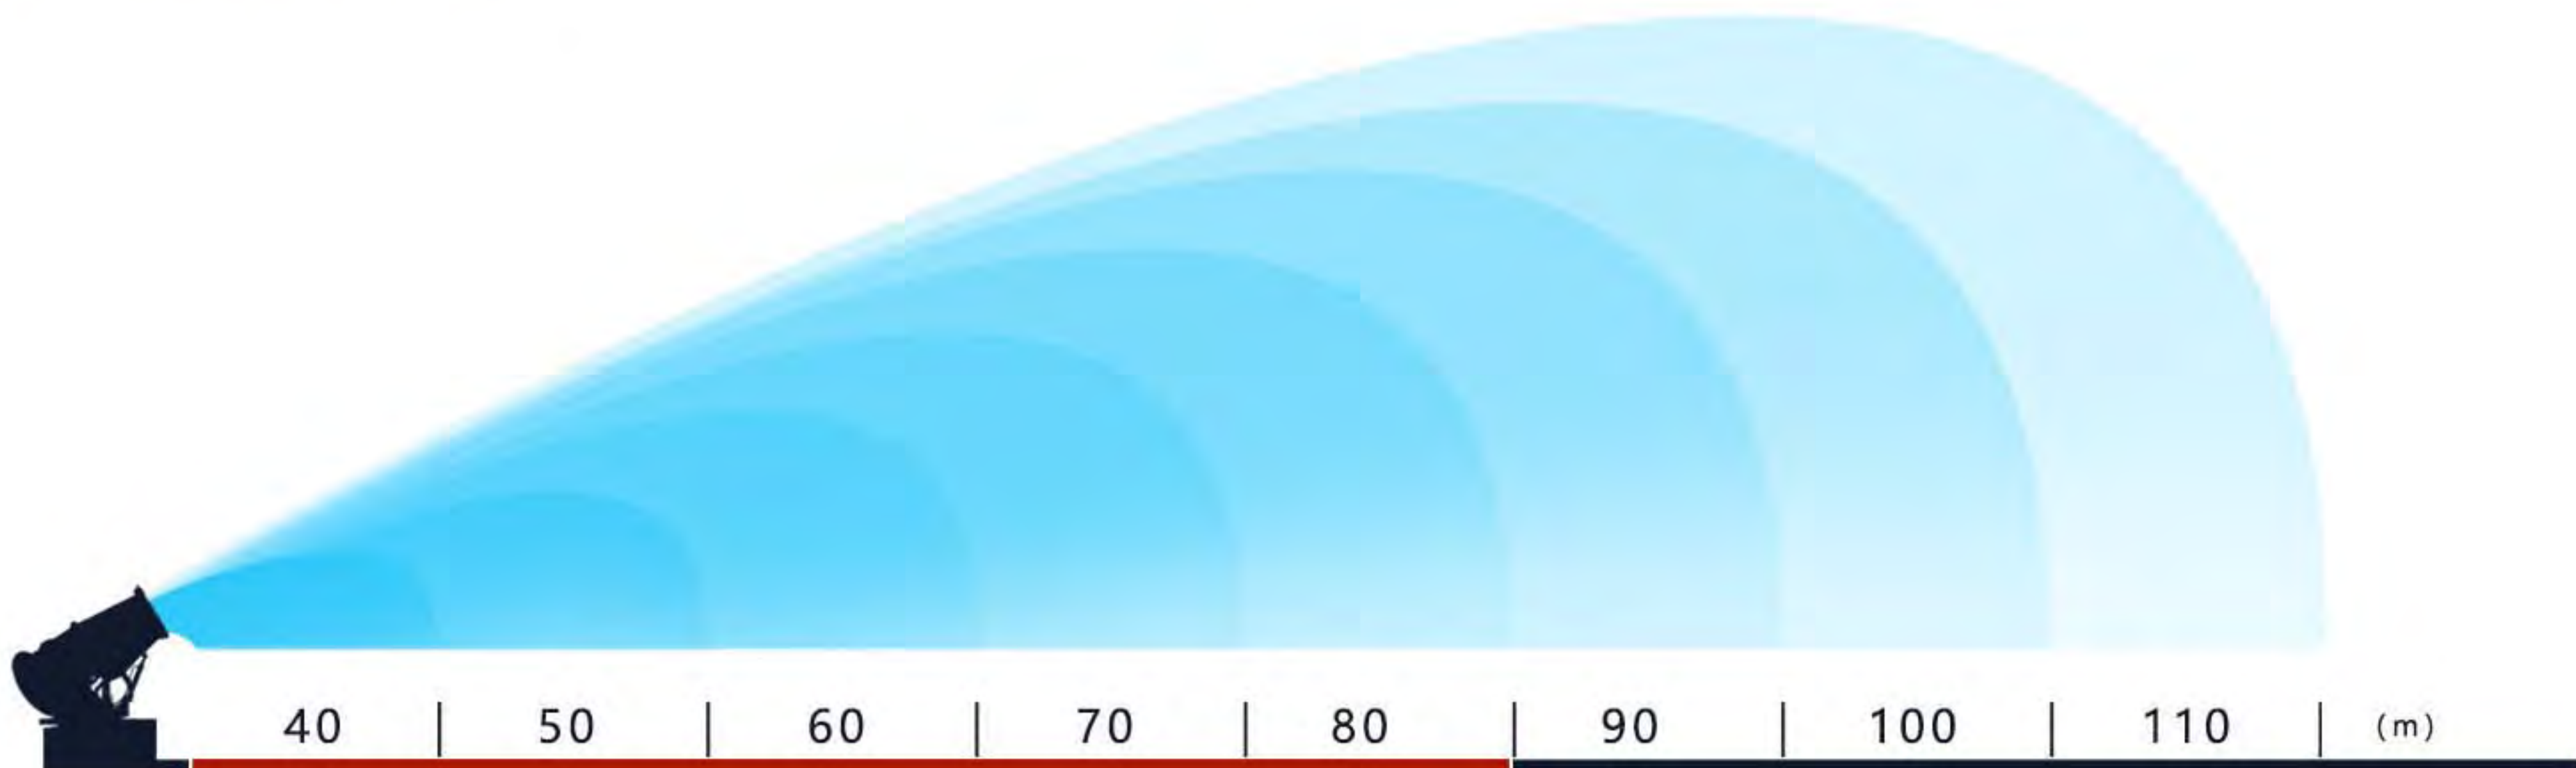



Model		RDSS-100	
Max. Throw (m) :	100	Voltage :	380V 50hz 3P
Nozzles :	100	Max. coverage area(m²):	18000
Water Consumption (L/min) :	240	Control mode :	Manual/remote control
Horizontal Rotation Angle :	0~360°	Rotation method:	Hydraulic
Elevation AnglePitch :	-10~45°	Weight (Kg)	1800
Water Pump :	Stainless steel multistage centrifugal pump		
Pump Power (Kw) :	11	Inlet size(in):	1.5
Nominal Fan Power (Kw) :	55	Dimension(L*W*H/m):	2.6*2.4*2.2

* Accept OEM customized solutions

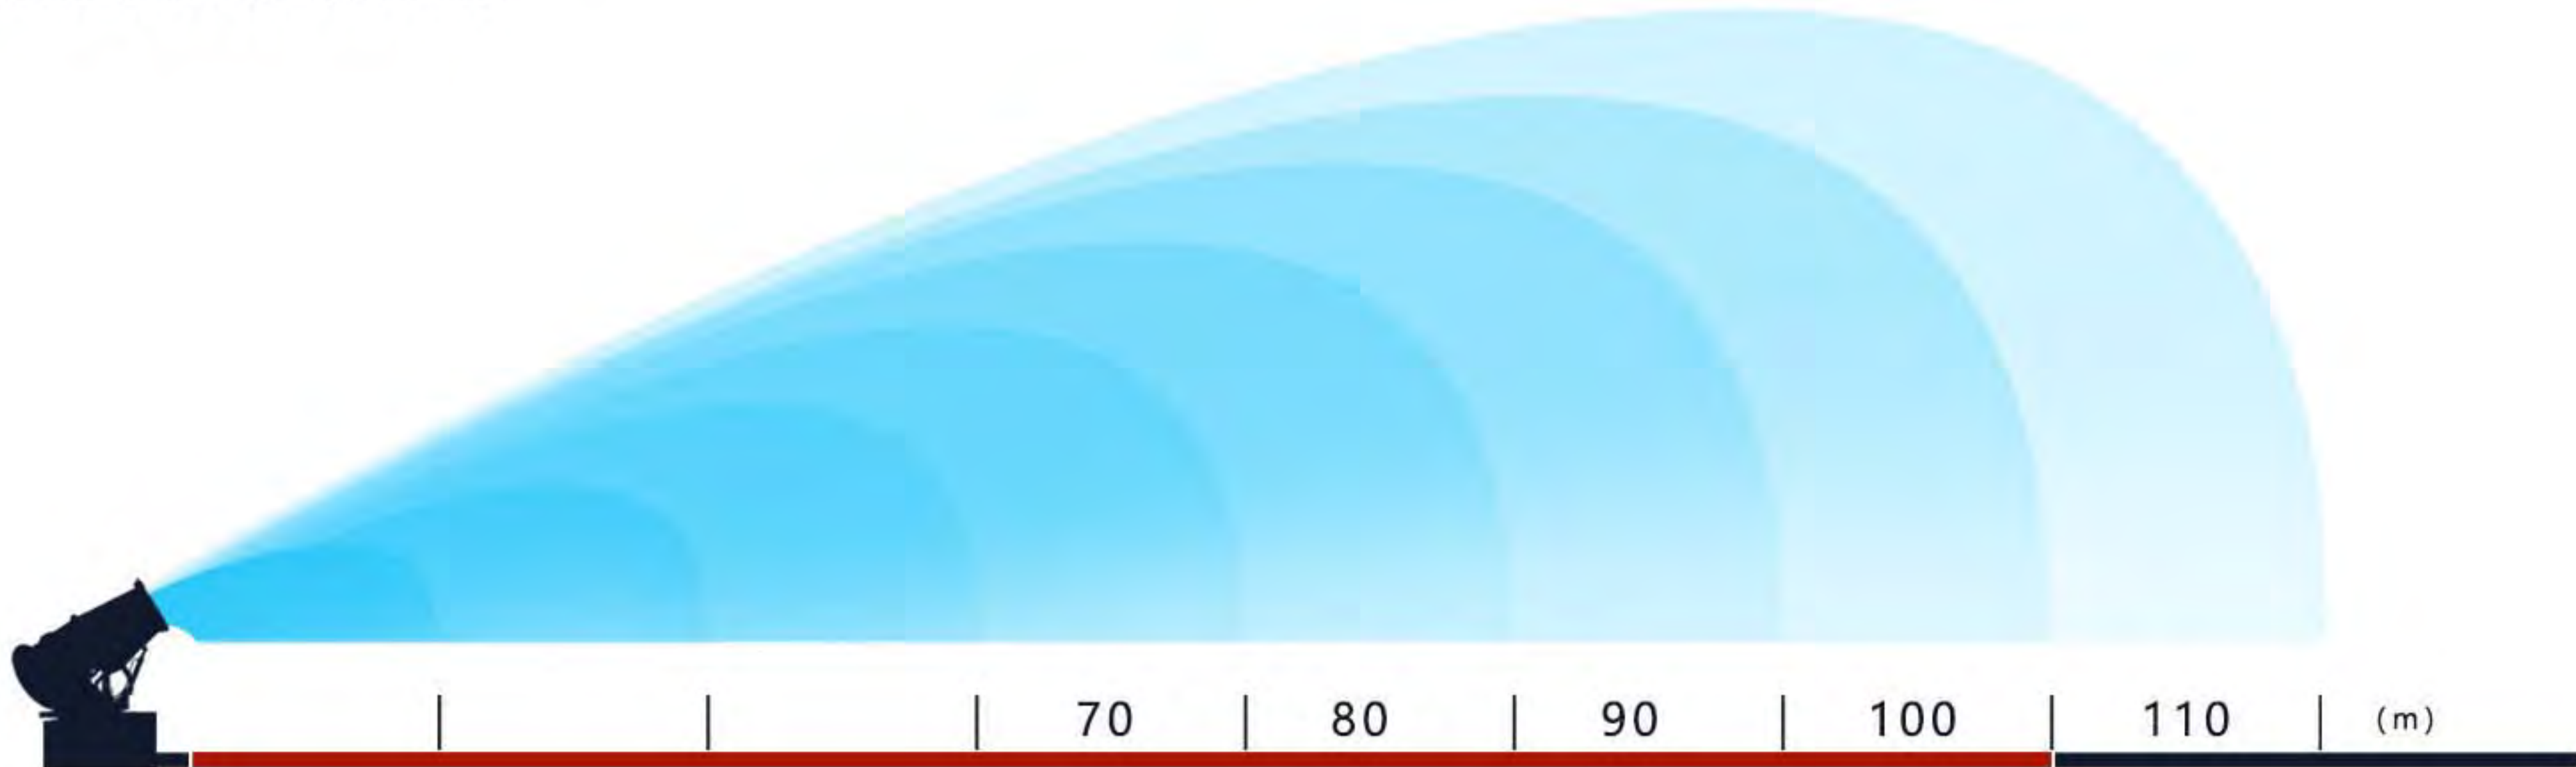



Model		RDSS-120	
Max. Throw (m) :	110	Voltage :	380V 50hz 3P
Nozzles :	110	Max. coverage area(m²):	20000
Water Consumption (L/min) :	240	Control mode :	Manual/remote control
Horizontal Rotation Angle :	0~360°	Rotation method:	Hydraulic
Elevation Angle :	-10°~45°	Weight (Kg)	2200
Water Pump :	Stainless steel multistage centrifugal pump		
Pump Power (Kw) :	15	Inlet size(in):	1.5
Nominal Fan Power (Kw) :	75	Dimension(L*W*H/m):	2.8*2.6*2.4

* Accept OEM customized solutions

